

# INSTALLATION INSTRUCTIONS


## (2-1/16") ELECTRICAL GAUGES

### TRUCK / YACHT GAUGE SERIES

## Boost Gauge


### Mounting

These gauges can be mounted in-dash or in Auto Gauge panels (2-5/8" dia. hole for 2-5/8" gauges). Fasten with brackets supplied as shown. (Hookup wire is required.) To assure proper functioning of this instrument, please read instructions thoroughly before installing.

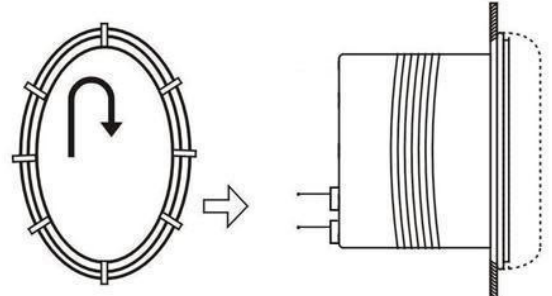

BOTTOM VIEW

### BACK VIEW

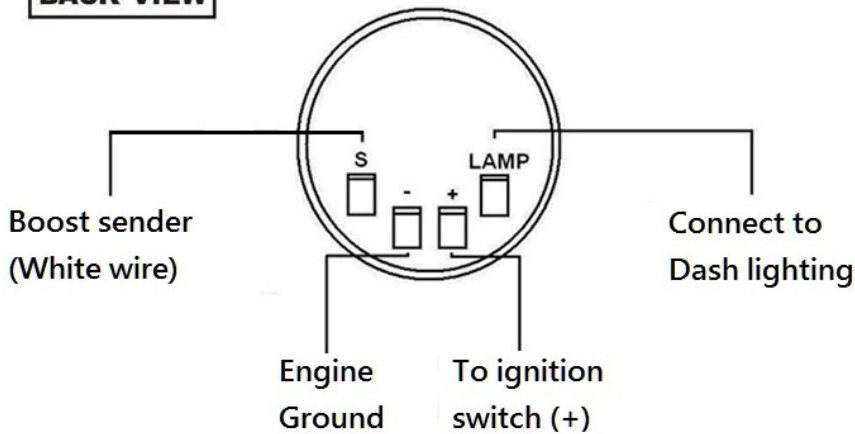

**\*\*In-line filter,**

Cut boost line and install supplied plastic "T" fitting.  
Connect "T" fitting to in-Line Filter with supplied hose.  
Then connect in-Line Filter to sender with supplied hose.

**\*\*Very important to keep foreign material out of the boost sender.**

